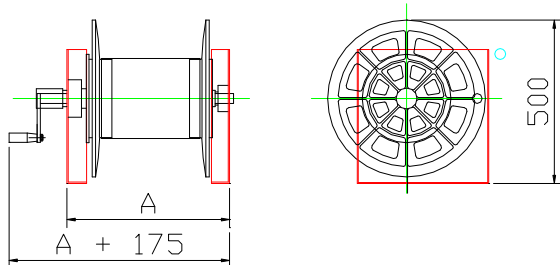


 CARROZZERIA CHINETTI s.r.l ITALY	SUBJECT
	HIGH PRESURE WATER HOSE REEL

MODEL		CHINETTI NAP HP 25/40	
			
HOSE REEL SPECIFICATIONS			
Service		High Pressure Water	
Type		Alimentation through the hub	
Diameter of alimentation coupling		32 mm	
Hose		High pressure hard rubber SAE 100R1 hose	
Hose diameter		25 mm	
Hose length		40 m	
Hose max. Working pressure		88 bar	
Hose Burst pressure		352 bar	
Rewind		Manual by crank lever	
Lock		At all positions	
Color		Red RAL 3000	
NOZZLE SPECIFICATIONS			
Type		High Pressure Pistol grip – with coupling	
Material		Light alloy	
Discharge / throw		50-100-150-230 lpm @ 40 BAR / 25 m	
Jet		Adjustable jet / fog / spray /	
Foam Tube		Detachable, available on request	
DIMENSIONS & WEIGHTS			
Dimension « A »		~ 450 mm	
Weight		60 kg - approx	
MATERIALS			
Flanges		Light alloy	
Drum		Light alloy	
Coupling		Brass / steel	
Side Supports		Steel	

Componente	NASPO IDRICO	Date	Sheet
Item	WATER HOSE REEL	10/10/17	1 of 1