


 CARROZZERIA CHINETTI s.r.l ITALY	SUBJECT
	HIGH PRESURE WATER HOSE REEL

MODEL	CHINETTI NAP HP 25/40
--------------	------------------------------

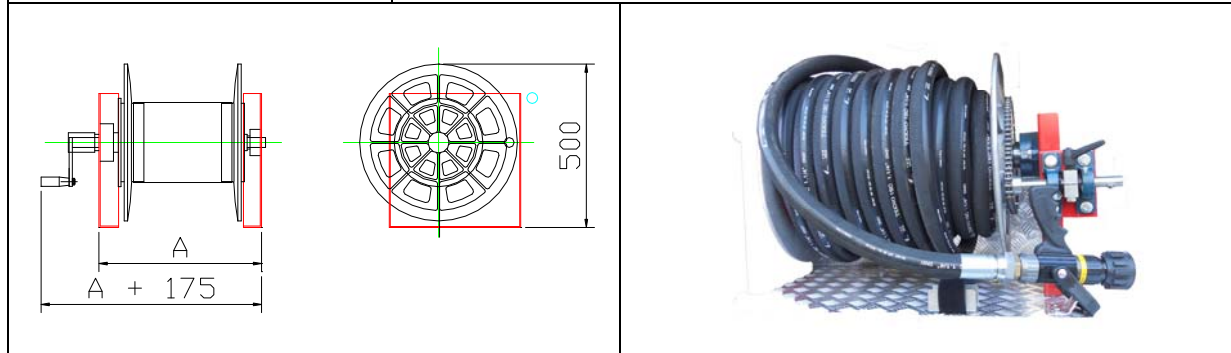

HOSE REEL SPECIFICATIONS

Service	High Pressure Water
Type	Alimentation through the hub
Diameter of alimentation coupling	32 mm
Hose	High pressure hard rubber SAE 100R1 hose
Hose diameter	25 mm
Hose length	40 m
Hose max. Working pressure	88 bar
Hose Burst pressure	352 bar
Rewind	Manual by crank lever
Lock	At all positions
Color	Red RAL 3000

NOZZLE SPECIFICATIONS

Type	High Pressure Pistol grip – with coupling
Material	Light alloy
Discharge / throw	50-100-150-230 lpm @ 40 BAR / 25 m
Jet	Adjustable jet / fog / spray /

DIMENSIONS & WEIGHTS

Dimension « A »	~ 450 mm
Weight	60 kg - approx

MATERIALS

Flanges	Light alloy
Drum	Light alloy
Coupling	Brass / steel
Side Supports	Steel

Componente	NASPO IDRICO	Date	Sheet
Item	WATER HOSE REEL	13/07/16	1 of 1